


CONSTRUCTION OF THE FLOOR

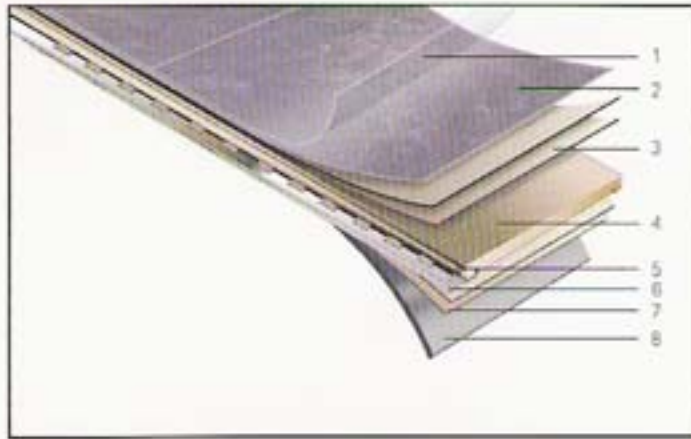

- 1 Special melamine impregnated overlay for high wear protection
- 2 Melamine impregnated decor paper
- 3 Impregnated thick Kraft paper
- items 1-3 form the high-pressure laminate surface
- 4 HDF wood-fibre core with Aqua Resist (very high density)
- 5 Sealed edges
- 6 Patented aluminium locking system
- 7 Balancing layer of high-pressure laminate (HPL)
- 8 Underlay: Alloc Silent System
(with Alloc Heating System if required)

PRODUCT SPECIFICATIONS

Format: Length 1207 mm, width 193 mm
 Thickness: 11 mm (including underlay)
 Box: 7 boards (1,63 m² - 14,5 kg)
 Surface: High-pressure laminate (HPL) EN 438
 Core: Alloc Aqua Resist (HDF)
 High density fibreboard

Edges: Sealed
 Backing: High-pressure laminate (HPL)
 Underlay: Alloc Silent System
 Locking system: Patented aluminium locking system
 Joint strength: More than 1200 kg/m
 Classification:



ALLOC STONE - QUALITY



Approved for emissions




Withstands chemicals



Does not fade in indirect sunlight



Environmentally friendly




Simple maintenance



High compressive strength




Scratch resistant



No burn marks



Simple stain removal




Suitable for office chairs*



Hard surface



Emits very little static electricity



Can be used with underfloor heating



Recommended by the Norwegian Asthma and Allergy Association



ALLOC EXTRA - MAKES THE BEST EVEN BETTER

We offer a wide range of mouldings: for connecting floor to wall, for compensating variations in floor levels, and for transitions to other types of flooring. The mouldings are supplied to match all Stone floors. Alloc cleaning agent makes cleaning simple. And should there be an accident, Alloc has a repair kit.

*For more technical information please visit our website at www.alloc.com